

Specification for two lane enclosed 'tp365' system

Overall two lane dimensions: 33m x 7.3m

'tp1' premium grade wilton woven synthetic playing surface carpets per lane: 27m x 3.65m green with blue borders

Optional: single tone green, NPC with green or blue borders Optional: training aid - contrasting stump lines

'tp5' premium grade tufted run up carpet per lane: 6m x 3.65m single tone green

Shock pads: per lane

'tp2' batting area: pace modifying shock pads for the pitching area 19m x 3.4m

'tp3' bowling area and run-up: load absorbing shock pad 14m x 3.6m

Steelwork system dimensions: per lane

Height: 4m

Lane length: 25.55m

Overall length 33m

Width: 3.6 - 3.65m

48mm diameter galvanised steel tubes set in a 52mm diameter socket. Optional: powder coated steelwork green or black

Optional: Pedestrian gate with latch

Netting systems

25.55m x 4m HD Protection tunnels: exclusive total-play design one seamless piece of total-play's 'HD' netting secured with PVC encapsulated tension wire

6m x 4m HD panel sidewalls

4m high white bowler netting



Single batting curtains (white mesh) 2m x 7.3m


Optional: green or black netting

Optional: additional 'double' or 'wrap' batting curtains Optional: total-play's 'HD' netting in walled panel design Optional: protection skirt in green or black (PVC): protects the bottom section of netting, either 500m or 1m high.


Security fence

All systems can be built with perimeter security fencing and gates, design options include gate width, fence height, colour and type of perimeter safety path.

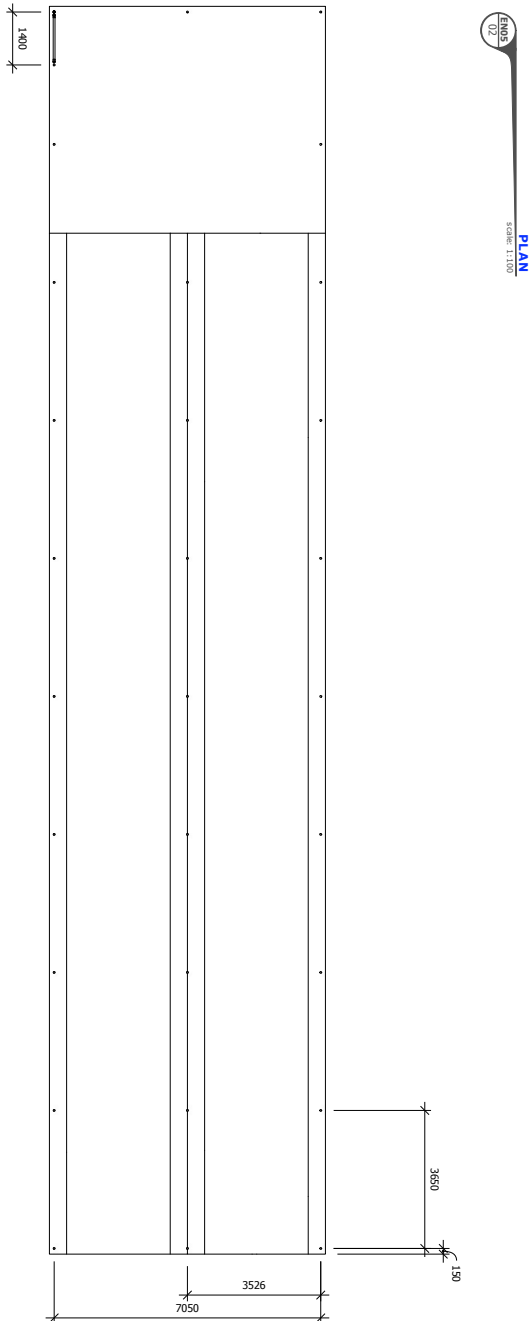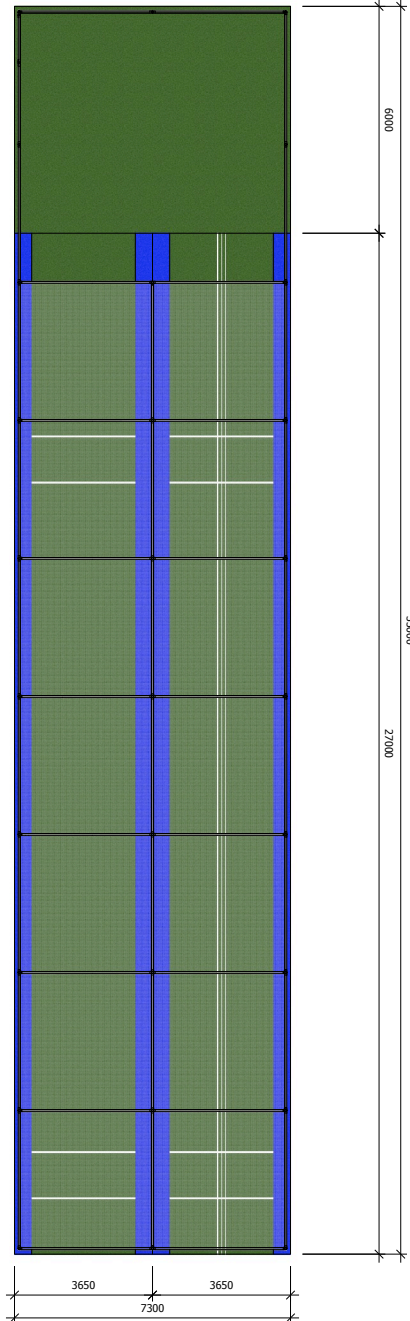


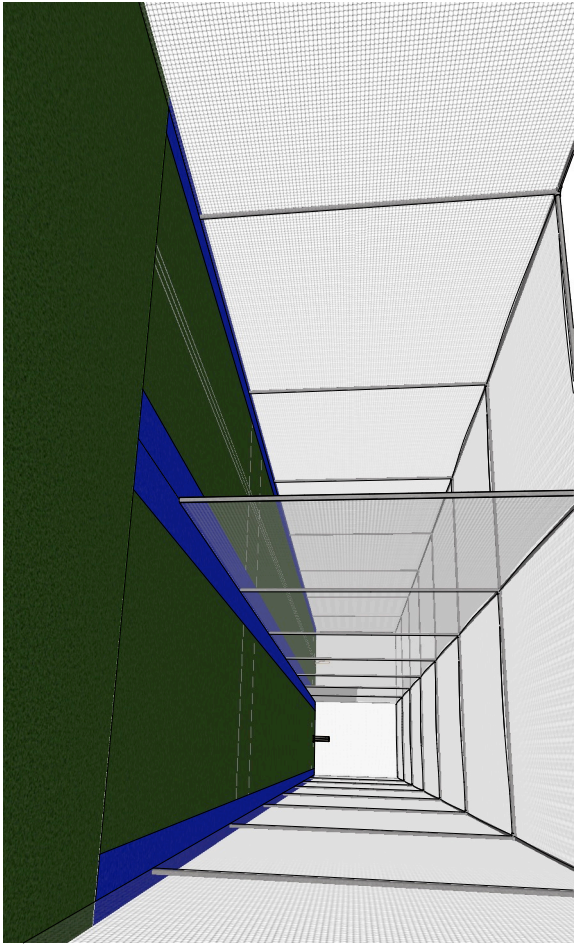


FRONT PERSPECTIVE
Scale: NTS

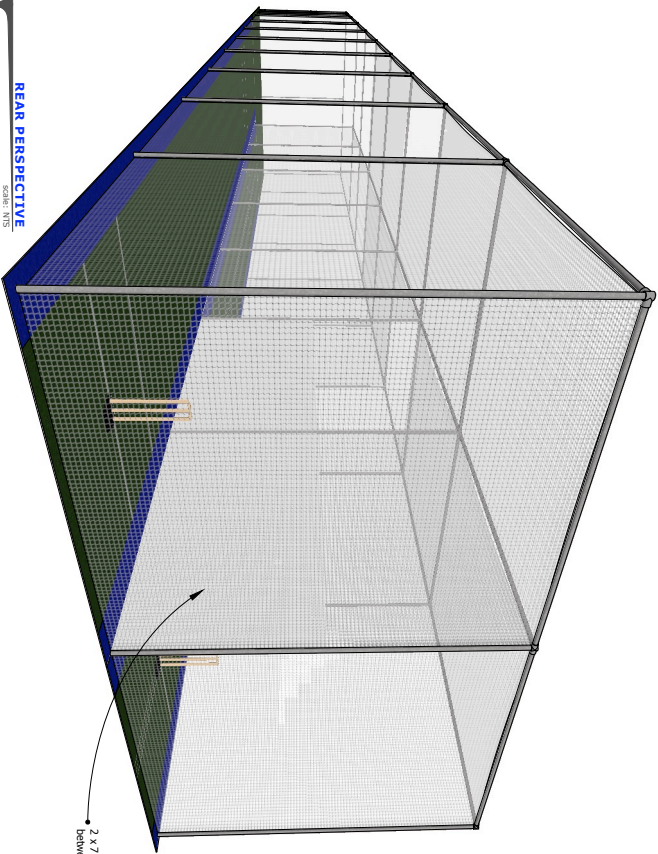

REAR PERSPECTIVE
Scale: NTS

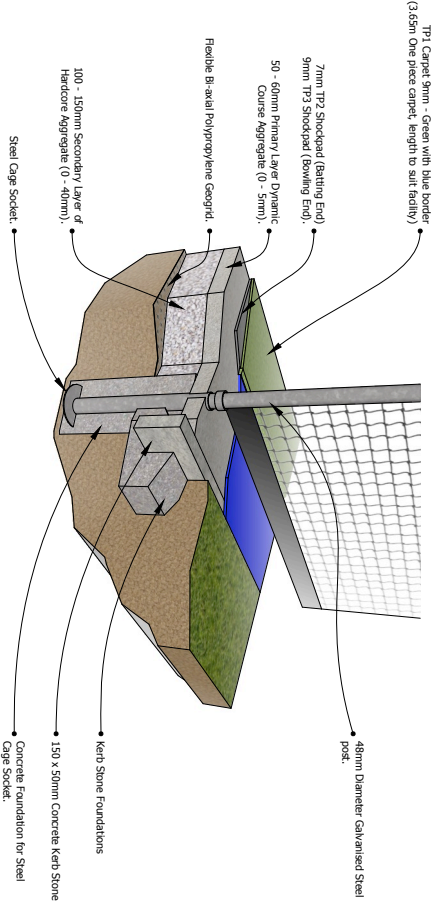

CAGE POST INSTALLATION
Scale: NTS

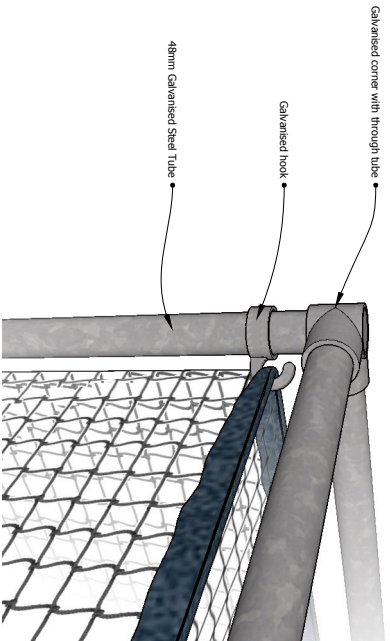

TOP CORNER DETAIL
Scale: NTS